

EDP architecture
 2800 SHELTON BLVD
 SUITE 3000
 HOUSTON, TEXAS 77056
 PHONE (713) 775-1000
 FAX (713) 775-1000
 www.edparchitecture.com
 TEXAS CALIFORNIA NEW YORK

3/32"=1'-0"

CODE DRAWING - PLAN - LEVELS 19 - 21

PROJECT "X"
 HOUSTON, TEXAS



ARCHITECT: BRITTON L. PERKINS
 FIRM: CODE NO. 145528-00

DRAWN BY: C.R.G.


CHECKED: DATE

REVISIONS

PROJECT NO. 07018.000
 ISSUED FOR FOUNDATION PERMIT
 ISSUED DATE: 07/30/2009
 FILE:

DRAWING NUMBER
 G012a

CODE PLAN

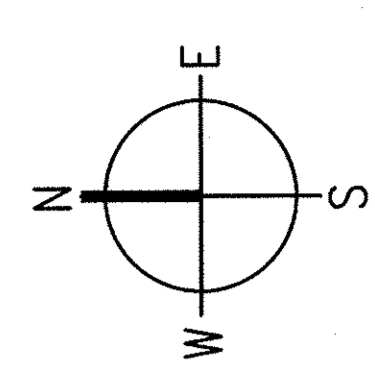

FOR REFERENCE ONLY

- EXTERIOR BEARING WALLS SHOWN ARE 3-HOUR MINIMUM RATED WALLS WITH UNPROTECTED OPENINGS PER TABLE 601.
- INTERIOR BEARING WALLS SHOWN ARE 3-HOUR MINIMUM RATED WALLS WITH UNPROTECTED OPENINGS PER TABLE 601.
- ALL EXTERIOR AND INTERIOR WALLS ARE OF NONCOMBUSTIBLE CONSTRUCTION.
- REFER TO BUILDING PLANS AND UNIT PLANS FOR PARTITION TYPES.
- TYPE M/S PRINKERED CONSTRUCTION PER TABLES 503 & 601.
- REFER TO ELECTRICAL FOR LOCATIONS OF ILLUMINATED EXIT SIGNS.
- REFER TO ELECTRICAL FOR LOCATIONS OF FIRE ALARM PULL STATIONS AND FIRE ALARM DEVICES.
- REFER TO ELECTRICAL FOR LOCATIONS OF HEAT AND SMOKE DETECTORS.

- | | |
|-------------------------------|---|
| CORRIDOR WALLS | REQUIRED: 1/2 HOUR CORRIDOR WALL PER TABLE 703.4 WITH 20-MINUTE PROTECTED OPENINGS PER TABLE 703.3. |
| PROVIDE: | 1-HR UL WALL ASSEMBLY #A19 WITH 20 MIN. PROTECTED OPENINGS. RE: A0118 |
| EXIT WALLS | REQUIRED: 2 HOUR EXIT ENCLOSURE PER SECTION 1004.1 WITH 90-MINUTE PROTECTED OPENINGS PER TABLE 703.3. |
| PROVIDE: | 2-HR UL WALL ASSEMBLY #A19 WITH 90 MIN. PROTECTED OPENINGS. RE: A0118 |
| SHAFT WALLS | REQUIRED: 2-HR UL WALL ASSEMBLY #A19 WITH 90-MINUTE PROTECTED OPENINGS PER TABLE 703.3. |
| PROVIDE: | 2-HR UL WALL ASSEMBLY #A19 OR 2-HR CONCRETE SHAFT PER TABLE 721.2.1 |
| STRUCTURAL FRAME | REQUIRED: 3 HOUR STRUCTURAL FRAME PER TABLE 601 |
| PROVIDE: | 4-HR FIRE WALL REFER TO SECTIONS. |
| UNIT SEPARATION WALL | REQUIRED: 1-HOUR DWELLING UNIT SEPARATION WALL |
| PROVIDE: | 1-HR UL WALL ASSEMBLY #A19 WITH 20 MIN. PROTECTED OPENINGS. RE: A0118 |
| ELEVATOR LOBBIES | REQUIRED: 4 HOURS PER POWER COMPANY REQUIREMENTS |
| PROVIDE: | 4-HR UL WALL ASSEMBLY #A19 WITH 3-HR MIN. PROTECTED OPENINGS. RE: A0114 |
| TRANSFORMER & WALK | REQUIRED: 1 HOUR DIMENSION WALL PER 703.3 FIRE PARTITIONS |
| PROVIDE: | 1-HR UL WALL ASSEMBLY #A19. |

2 GENERAL NOTES

3 LEGEND

